

INFINITY

INDY LITE


COMPLIMENT

LYNC

TECHNICAL





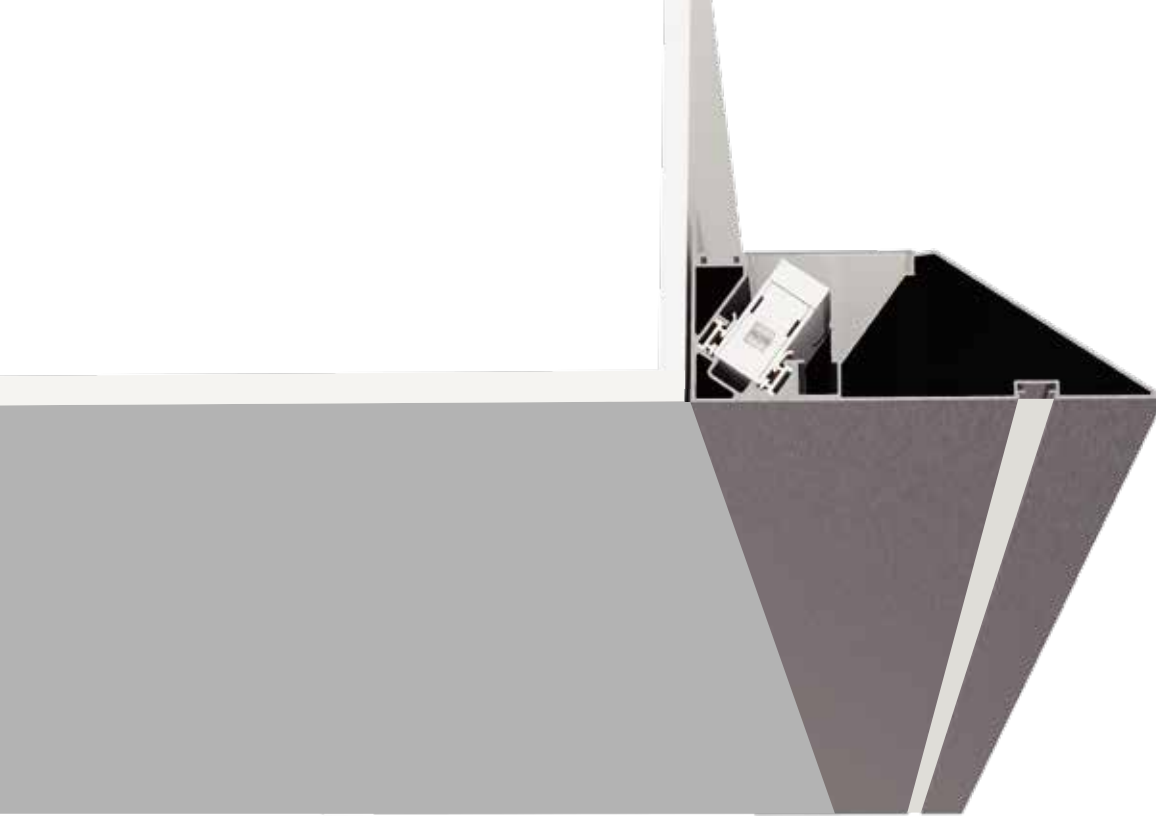


INDY LITE



Indirect lighting, has now gained it's own seat at our table of key products. Under the name of 'IndyLite' we've been able to successfully create a type of indirect lighting applicable in any environment. Living rooms to bedrooms and even washrooms...we're literally everywhere.



INDY LITE 4.0 **INDY SIDE**




TRACK HOUSING	Mounting	Recessed, Surface, Pendant			
	Track housing type & length	 Linear module			
		600mm 23 5/8"	900mm 35 7/16"	1200mm 47 1/4"	2400mm 94 1/2"
	IP Rating	Indoor (IP20)			
	Material	Aluminium, Polycarbonate			
LAMP MODULE	Lamp module length	600mm 23 5/8"	900mm 35 7/16"	1200mm 47 1/4"	
	Wattage	SIMPLE LYNC	12W 18W	18W 27W	22W 36W
	Light adjustability	SIMPLE	3000K, 4000K, 5700K		
		SIMPLE+DALI	3000K, 4000K, 5700K, dimming		
		LYNC WHITE	2200-6500K, dimming		
		LYNC COCKTAIL	RGB colors, 2200-6500K, dimming		
	Rated voltage	SIMPLE	220-240VAC (Voltage Range:198-264VAC), 50-60Hz		
		SIMPLE+ DALI LYNC WHITE LYNC COCKTAIL	100-240VAC (Voltage Range:90-297VAC), 50-60Hz 220-240VAC (Voltage Range:198-264VAC), 50-60Hz 100-270VAC (Voltage Range:90-297VAC), 50-60Hz 100-270VAC (Voltage Range:90-297VAC), 50-60Hz		
Emission	Symmetric				
Electric gear	SMPS				
CONTROL	Connectivity	DALI	External Gateway		
		SIMPLE+ LYNC WHITE LYNC COCKTAIL	Wireless Bluetooth control system Wireless Bluetooth control system Wireless Bluetooth control system		
	Pairable Devices	DALI	Dali compatible control system		
	SIMPLE+ LYNC WHITE LYNC COCKTAIL	Lync remote, sensor, app Lync remote, sensor, app Lync remote, sensor, app			
Certification	     				

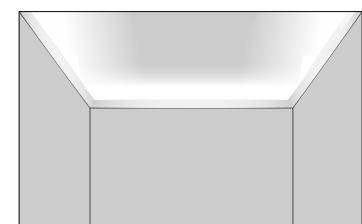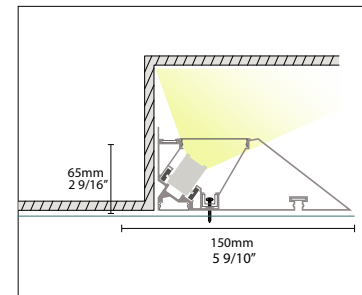





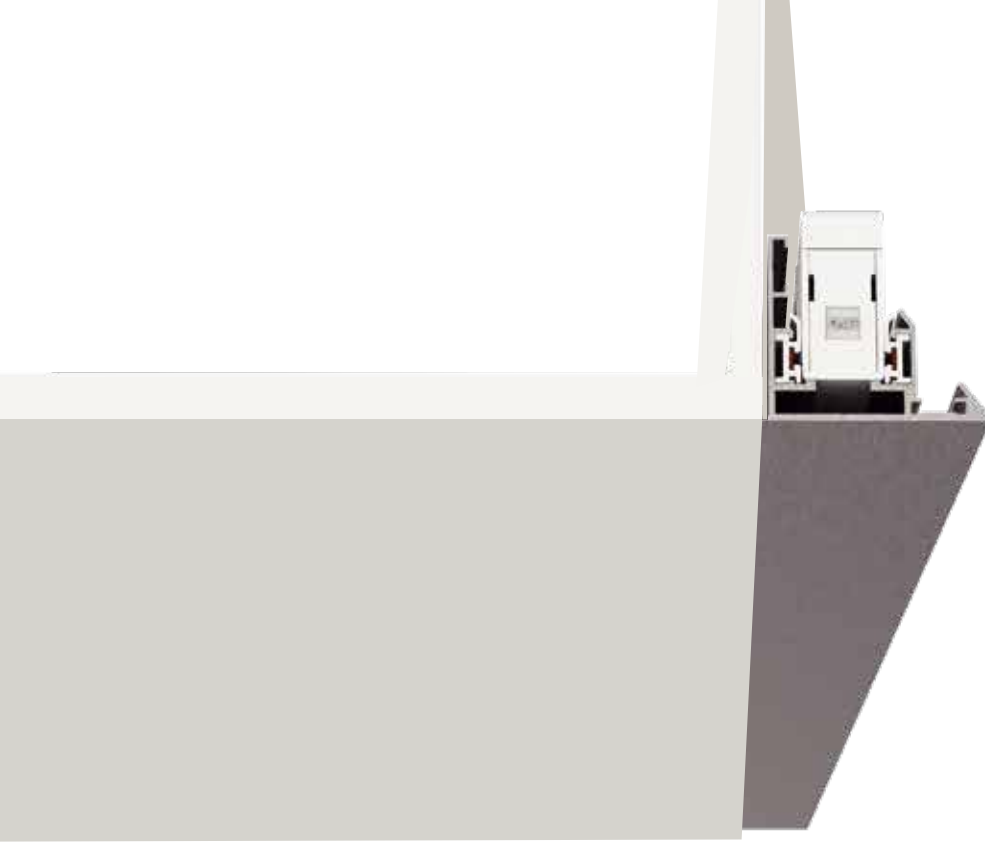


90° horizontal module
inside lighting







INDYLITE 4.0 INDY UP




TRACK HOUSING	Mounting	Recessed, Surface, Pendant			
	Track housing type & length	 Linear module			
		600mm 23 5/8"	900mm 35 7/16"	1200mm 47 1/4"	2400mm 94 1/2"
	IP Rating	Indoor (IP20)			
	Material	Aluminium, Polycarbonate			
LAMP MODULE	Lamp module length	600mm 23 5/8"	900mm 35 7/16"	1200mm 47 1/4"	
	Wattage	SIMPLE LYNC	12W 18W	18W 27W	22W 36W
	Light adjustability	SIMPLE	3000K, 4000K, 5700K		
		SIMPLE+/DALI	3000K, 4000K, 5700K, dimming		
		LYNC WHITE	2200-6500K, dimming		
		LYNC COCKTAIL	RGB colors, 2200-6500K, dimming		
	Rated voltage	SIMPLE	220-240VAC (Voltage Range:198-264VAC), 50-60Hz		
		SIMPLE+	100-240VAC (Voltage Range:90-297VAC), 50-60Hz		
		DALI	220-240VAC (Voltage Range:198-264VAC), 50-60Hz		
	LYNC WHITE	100-270VAC (Voltage Range:90-297VAC), 50-60Hz			
	LYNC COCKTAIL	100-270VAC (Voltage Range:90-297VAC), 50-60Hz			
	Emission	Symmetric			
	Electric gear	SMPS			
CONTROL	Connectivity	DALI	External Gateway		
		SIMPLE+	Wireless Bluetooth control system		
		LYNC WHITE	Wireless Bluetooth control system		
	LYNC COCKTAIL	Wireless Bluetooth control system			
Pairable Devices	DALI	Dali compatible control system			
	SIMPLE+	Lync remote, sensor, app			
	LYNC WHITE	Lync remote, sensor, app			
	LYNC COCKTAIL	Lync remote, sensor, app			
Certification	     				

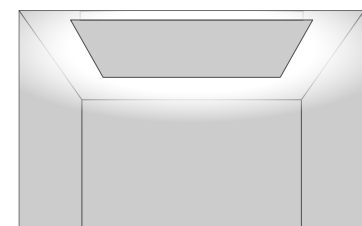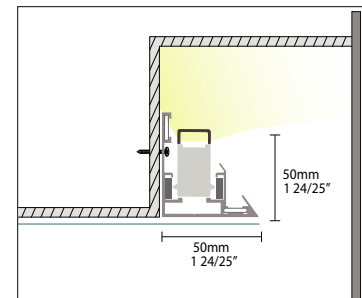





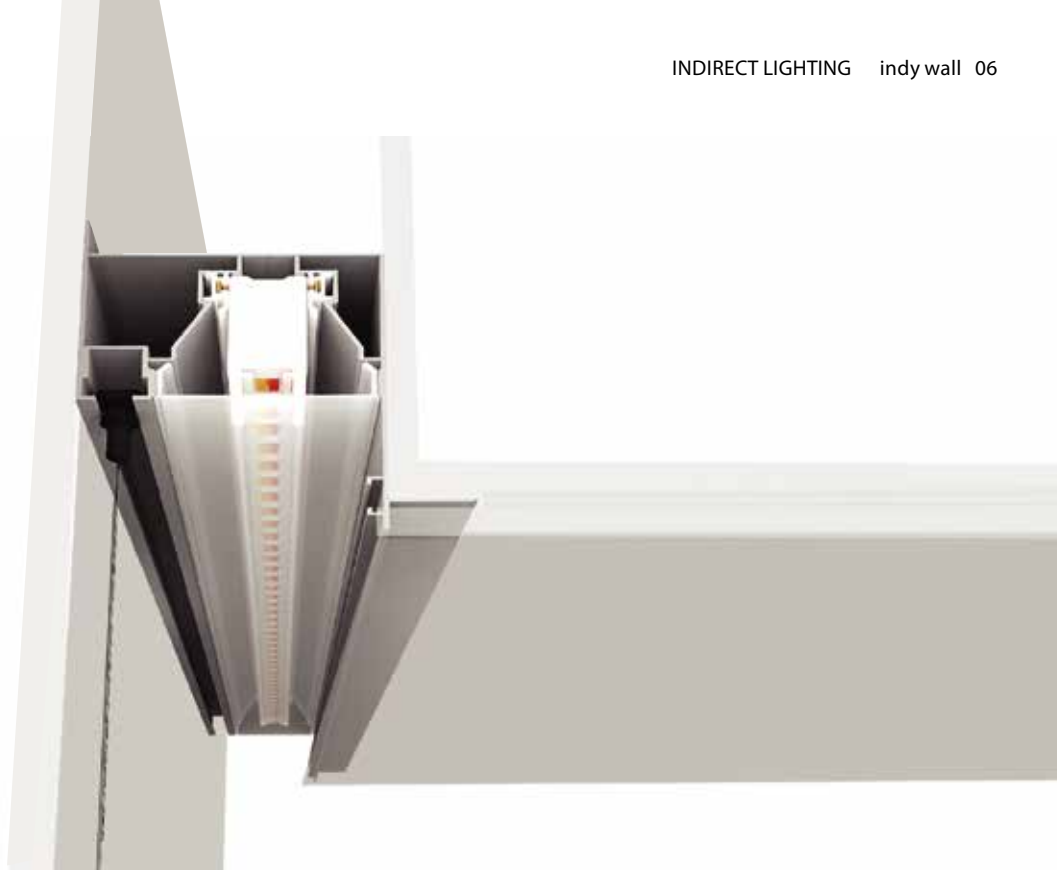


90° horizontal module
outside lighting







INDYLITE 4.0 INDY WALL



TRACK HOUSING	Mounting	Recessed, Surface, Pendant			
	Track housing type & length	 Linear module			
		600mm 23 5/8"	900mm 35 7/16"	1200mm 47 1/4"	2400mm 94 1/2"
	IP Rating	Indoor (IP20)			
	Material	Aluminium, Polycarbonate			
LAMP MODULE	Lamp module length	600mm 23 5/8"	900mm 35 7/16"	1200mm 47 1/4"	
	Wattage	SIMPLE LYNC	12W 18W	18W 27W	22W 36W
	Light adjustability	SIMPLE	3000K, 4000K, 5700K		
		SIMPLE+/DALI	3000K, 4000K, 5700K, dimming		
		LYNC WHITE	2200-6500K, dimming		
		LYNC COCKTAIL	RGB colors, 2200-6500K, dimming		
	Rated voltage	SIMPLE	220-240VAC (Voltage Range:198-264VAC), 50-60Hz		
		SIMPLE+ DALI LYNC WHITE LYNC COCKTAIL	100-240VAC (Voltage Range:90-297VAC), 50-60Hz 220-240VAC (Voltage Range:198-264VAC), 50-60Hz 100-270VAC (Voltage Range:90-297VAC), 50-60Hz 100-270VAC (Voltage Range:90-297VAC), 50-60Hz		
Emission	Symmetric				
Electric gear	SMPS				
CONTROL AND OTHER	Connectivity	DALI	External Gateway		
		SIMPLE+ LYNC WHITE LYNC COCKTAIL	Wireless Bluetooth control system		
	Pairable Devices	DALI	Dali compatible control system		
	SIMPLE+ LYNC WHITE LYNC COCKTAIL	Lync remote, sensor, app Lync remote, sensor, app Lync remote, sensor, app			
Certification	     				

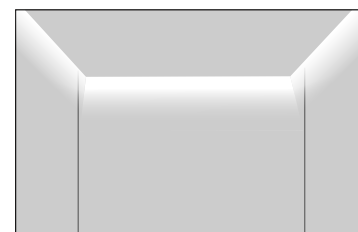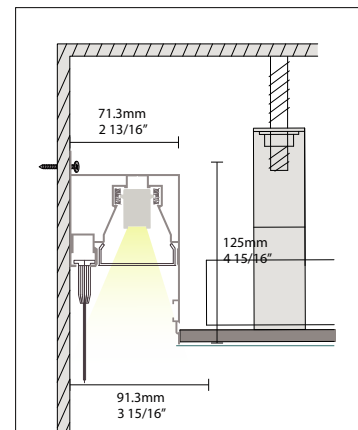

90° horizontal module wall wash lighting