

## Luminex™ G1 **\_2000LE\_** EDGE-LIT FLAT LED 4"x80" PANEL

6/28/12 Updated



A high performance LED flat panel designed to lay in to drop ceilings; Suitable for office, school, hospital and medical facility applications. Panels are fully dimmable, and are compatible with building controls, motion sensors, timers, and daylight harvesting systems. The design of the panels produces an even, consistent shadowless light. The LEDs mean long life, high lumen maintenance, high CRI, and low maintenance, with no hazardous materials.

PROJECT NAME	
CATALOG NUMBER	
LOCATION	
NOTE	

### FEATURES:

- Lumens: 3500K/4500K: 3645 / 5500K/6700K: 3888 Lumens @ CRI 80
- Lumens: 3500K/4500K: 3159 / 5500K/6700K: 3645 Lumens @ CRI 90
- 60 Watts
- CCT: 3500K, 4500K, 5500K, 6700K
- 50,000 Hour Life (L70)
- 8.6 Lbs
- DMX dimming
- 5 Year Warranty
- CRI: 80, 90
- Optional remote power supply as required
- Surface mount and suspension kits available



• Frame Finish : Aluminum, White Painting

### CONTROL:

- Standard discrete driver on back
- DMX repeater required for 0~10v dimming control, Up to 200 panels per repeater

### CONSTRUCTION:

- The housing and back panel are aluminum
- Unique mounting gives flush-fit in drop ceiling providing heat sink and thermal control capabilities
- Lens is translucent white polycarbonate
- Profile i: 1/2"

### Luminaire Ordering Information:

**Typical Order Example - Catalog# : L2000LE6035H\_RP\_G1**

	Dimension	Optic	Wattage	Color	CRI	Option	Dimming
L = Luminex™	2000L = 4"x80"	E = Edge-Lit	60 = 60Watt	35 = 3500 45 = 4500 55 = 5500 67 = 6700	M = 80 H = 90	RP = Remote PSU Max. 50 ft	G1 = DMX

### Optional Accessories:

Item	Model Number	Description
Luminex™	L-PSK	Aircraft cable suspension kit
	L2000LESMK	Surface mount kit 4"x80" Edge-Lit



## Luminex™ G1 **\_2000LE\_** EDGE-LIT FLAT LED 4"x80" PANEL

6/28/12 Updated



### ■ SPECIFICATION

Item	Specification	
1 Outline Dimension	4(W) x 80(L) x 1/2(H) [Inch]	
2 Weight	8.6 [lbs]	
3 Operating Temperature	14 [°F] ~ 132 [°C]	
4 Operating Voltage	100~ 277 [VAC], 50/60Hz	
5 DC Output	48V TYP.	
5 Nominal Input Power	60 [Watt]	
6 PSU P.F. >0.9	Model	JH-80HE
	Certification	UL E343524
	Dimming Signal	DMX512

### ■ PRODUCT IMAGE




• Frame Finish : Aluminum, White Painting

### ■ PHOTOMETRIC

	Class		Condition	Luminous Flux *
	CRI(Ra)	CCT [°K]		Typ.[lumen]
1	CRI 80	3,200 / 4,500	60Watt., Ta=77°F	3645
2		5,500 / 6,700		3888
3	CRI 90	3,200 / 4,500		3159
4		5,500 / 6,700		3645

### ■ POLAR DIAGRAM

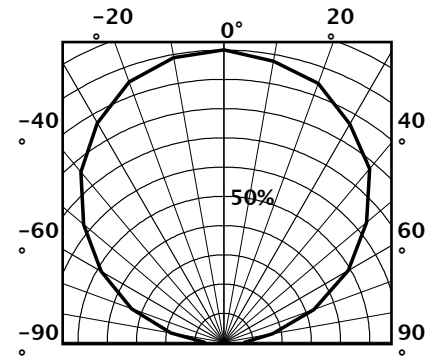

### ■ DIMENSION

